


ELEVATION

4 holes DIA 60

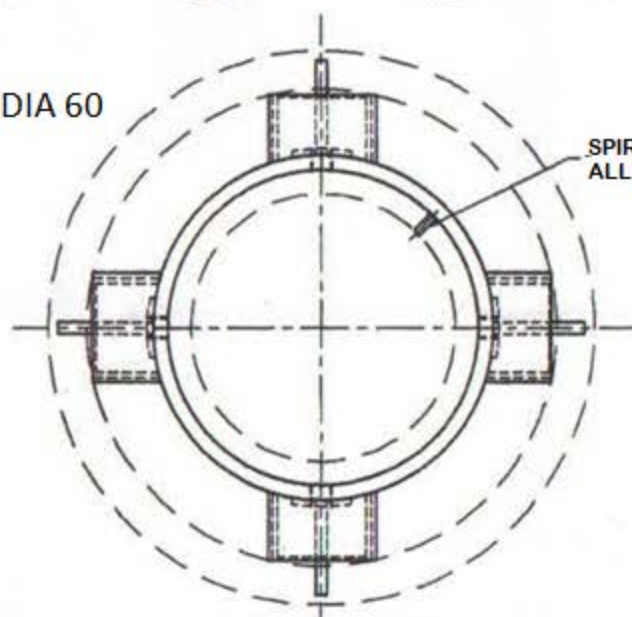

VIEW ON A-A

SPIRAL FL-40X12 TH
ALL THROUGH PIPE LENGTH

CONVEYOR (LH & RH)
MATERIAL FOR FLIGHT AISI 410
MATERIAL FOR TUBE ASTM 106

ANGLE 130X130;
DEPTH 110 ; 20MM
THICK

FIXED BY LINK CHAIN (19 mm GRADE 80 CHAIN conforming
ASTM A 391 STANDARD)

IN CASE OF RH, THE ORIENTATION OF FLIGHT SHALL BE REVERSED KEEPING ALL
OTHER DIMENSIONS SAME

FOR TENDER PURPOSE ONLY

BOKARO POWER SUPPLY CO. LTD.

SCALE 1: 10	DATE	PROJECT:- BOKARO STEEL PLANT
DRAWN: S.H.	31..08.15	TITLE:-
CHECKED: A. K.		FLEXIBLE SCREW CONVEYOR (LH)
REF.DRG. NO- 0.03.021.0.51.3 000	DRAWING NO.- BPSCL/FSC/001	rev-01

ALL DIMENSIONS ARE IN MM.