


ALL DIMENSIONS ARE IN mm.

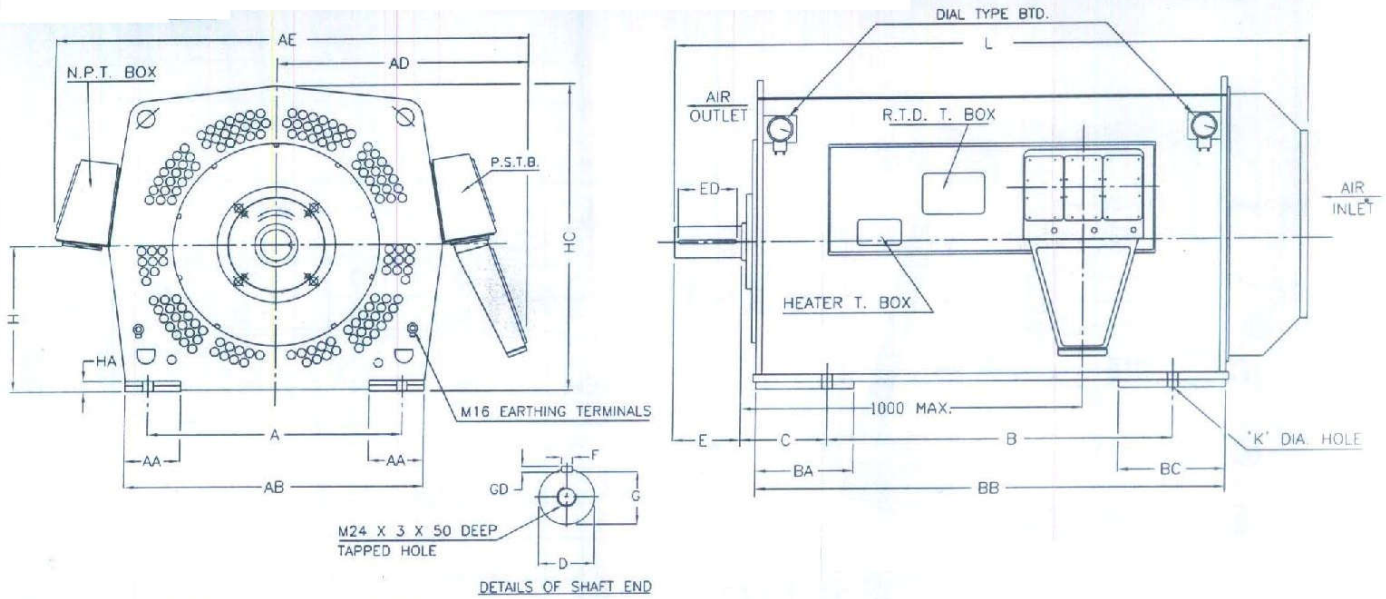

DIRECTION OF ROTATION :- BI-DIRECTIONAL.

FRAME	A	B	C	K	BB	BA	BC	AB	AA	HA	H TOL -1	HC MAX.	AD MAX.	AE MAX.	D		E	ED	F TOL -0.02	GD	G TOL -2	L MAX.
															NOM.	TOL.						
TS560	940	1050	209	40	1420	260	420	1170	220	44	560	1250	1150	2100	110	+0.25 +0.03	210	190	32	18	99	2100

TS560; 300KW; 4 POLE; 6600 VOLTS $\pm 10\%$, 50Hz $\pm 5\%$ TETV H.T. MOTOR WITH P.S.T.B.; NPT BOX; 2 NOS. SPACE HEATER; 2 NOS. DIAL BTD & 6 NOS. RTD.

ENCL. - IP55 (TETV)

MOTOR WT. - 4200KG. (APPX.)

NOTE:-

1. MOTOR WT. - 4200KG. (APPX.)
2. RTD - PL.100 SIMPLEX TYPE, 6 NOS.
3. BTD - DIAL TYPE, 2 NOS.
4. SPACE HEATER - 2 x 400 WATTS, 240 V, 50 Hz, 1 Ph.

Bokaro Power Supply Co. (P) Limited

GA of 6.6 KV, 1488 RPM, 300 KW
Mill Fan Motor

Drg. No.

BPSCL- MF 300 - 0001